



SATA TRUESUN
including battery
charger and battery
Part No. 1012129



STORAGE CASE
including foam inlay
Part No. 1013094

Accessories	Part No.
Foam inlay only with shaped area to go into SATA® trueSun™ storage case	1013151
Battery	1010082
Battery charger	1006445
Protective lens holder	1012096
Lens only	1012137

PREMO FLEX BREATHING HOSE

Top quality breathing hose for breathing air and air tools. Available in lengths up to 100 feet. Part No. upon request



SATA® CARE SET™

The practical tool bag containing useful utensils for gun cleaning and maintenance. Items marked with a red surround are not included in the scope of delivery. Part No. 162628



SATA® RPS™

SATA RPS (Rapid Preparation System) is the ideal cup system for shops focusing on perfect finishes, high profitability and increases productivity. The RPS multipurpose cup system offers many benefits: bendable, refillable, cleaning the spray gun is an easier process. Available sizes: 0.3 l, 0.6 l and 0.9 l. Part No. upon request



**SATA® AIR VISION 5000
REGULATOR SET**

Includes SATA air vision 5000 hood, SATA air regulator belt, SATA air regulator (no charcoal)
Order No. 1005603

X767 GUARDIAN CO MONITOR

110 volt AC Carbon Monoxide Monitor
Audible and visual alarms for high CO or sensor failure. LCD digital readout



Order # X767-PLUS

SATA® FILTER 584™

Triple-stage filter (with activated charcoal) – to apply VOC-compliant paints, such as waterborne or high-solid paints.
Order No. 1099953



**SATA® AIR VISION 5000
CARBON REGULATOR SET**

Includes SATA air vision 5000 hood, SATA air regulator belt, SATA air carbon regulator. Version with activated charcoal adsorber
Order No. 214718

DAN-AM KNEELER

Dan-Am Kneeler is an excellent tool to cushion your knees on rough or hard surfaces.
Order # KNE0002



Your SATA dealer



SATA USA Inc.

One Sata Drive · PO Box 46
Spring Valley, MN 55975
Phone: 800-533-8016
E-mail: satajet@satausa.com
www.satausa.com

Errors and technical alterations reserved - SATA, SATAjet and/or other SATA products referenced herein are either registered trademarks or trademarks of SATA GmbH & Co. KG in the U.S. and/or other countries.

50 SATA trueSun
Printed in U.S.A.
24-0301

SATA® trueSun™



German Engineering



The Daylight Solution

SATA® trueSun™ – the Daylight Solution

The selection of the correct color shade for refinishing a vehicle requires a source of light that preferably reproduces the entire color range of visible light (daylight) as accurately as possible.

The SATA® trueSun™ LED lamp which was especially designed for this purpose allows a quick and easy professional color shade evaluation and identification within the body shop. When selecting the right daylight lamp there is no room for compromise, any rework caused by an incorrect color identification is an expensive mistake with high rework costs. Even avoiding one rework covers the purchase price for this high quality product.



Adjustable light intensity



Battery level display



Watch
the video at
www.satausa.com



PRODUCT BENEFITS

- Near perfect daylight conditions on any color shade, no need to move the project outside
- Uniform distribution of the light intensity across the entire light cone
- Battery life approximately 70 minutes at full light intensity, lasting for an entire days production in most shops
- Uniform light intensity – unaffected by the battery charge level
- Fast charging cycle time of approximately 50 minutes
- Adjustable light intensity
- Built-in charge level display
- Near daylight reproduction of color pigments
- Coating flaws such as mottling and poor hiding can be easily detected

Uniform distribution of the light intensity

The uniform light distribution across the entire illuminated area simplifies selecting the right color shade. The light intensity can be adjusted via the sliding control on the back of the light.

The light intensity remains the same throughout the entire battery life, which removes aggravating interruptions during the color match process.



Light cone of the SATA® trueSun™


at maximum light power, uniform distribution of the light intensity from edge to edge – color temperature is neutral

Daylight lamps used for color shade determination, by comparison




Example high quality flashlight manufacturer A

Very small, non-uniformly illuminated surface, strong yellow coloration




Example daylight lamp manufacturer B

Uniform distribution of the light intensity, but very strong yellow coloration.



Example daylight lamp manufacturer C

inconsistently illuminated surface, edges appear greenish/bluish



Example daylight lamp manufacturer D

inconsistently illuminated surface, edges appear reddish.

TECHNICAL DATA

LED light

Total weight	approx. 1.04 pounds
CRI value	97
Color Temperature	approx. 5,600 K
Light intensity (lux)	22,000 lx at 11.8" distance
Operating temperature LED lamp	32°F - 104°F
Storage temperature LED lamp	-4°F - 176°F
Battery life at full light intensity	approx. 70 min.
Battery operating time	approx. 70 min.

Battery

Weight	.66 pounds
Rated voltage	10.8 V
Capacity	2.7 Ah
Max. charging current	2.5 A
Max. discharging current	5 A
Charging temperature	32°F - 113°F
Discharging temperature	32°F - 140°F


Charger

Weight	.86 pounds
Rated voltage input	100 - 120 V (50/60 Hz) / 220 - 240 V (50/60 Hz)
Rated voltage output	10.8 V
Charging current	2.4 A
Charging time	approx. 50 minutes
Charging temperature	50°F - 113°F
Protection rating	II
Operating temperature	32°F - 104°F

KNOWLEDGE

Color temperature

The color temperature of a light source is indicated in Kelvin (K). The temperature has influence on the optic impression. Therefore, it should be in a neutral range when defining the color shade. The daylight (sunlight) at noonday sun has a color temperature of approximately 5,500 – 5,800 K.

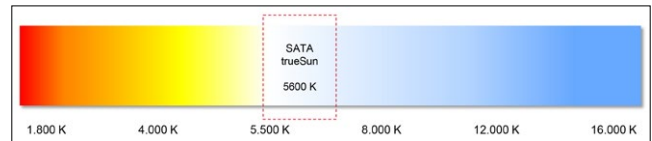


CRI value


The CRI value (Color Rendering Index) indicates the quality of the color reproduction of a light source. This value is composed of the average value of 14 defined reference colors.

Daylight CRI value: 100

SATA® trueSun™ CRI value: 97

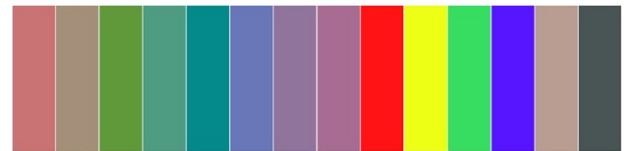

Spectral distribution – daylight & SATA® trueSun™

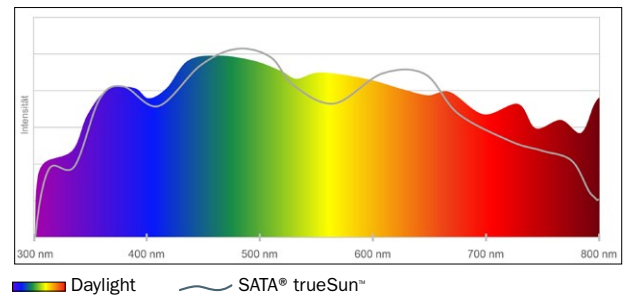

Lux (lx)

Lux indicates the illumination intensity of a light source.

Daylight lux value: up to 100,000 lx

SATA® trueSun™ lux value: 22,000 lx at 11.8 inch distance

WARNING: The use or storage of the SATA® trueSun™ LED lamp as well as the batteries and chargers in explosive or inflammable areas is prohibited.